



DATE STAMPS

CH SERIES: COMPACT HEIGHT

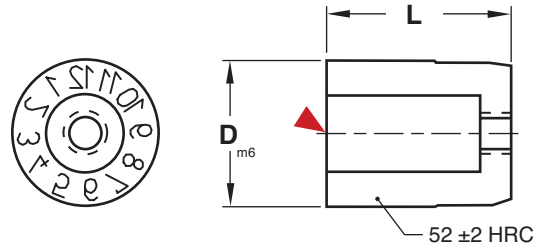

PLUGS

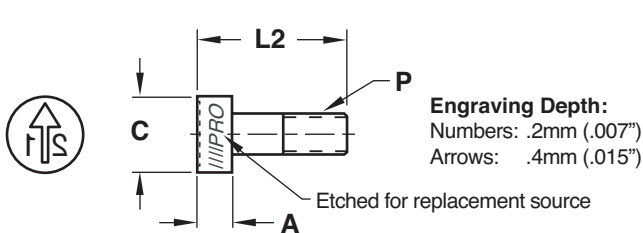

M 420 Stainless (1.4034) **H** 54-58 HRC

CATALOG NUMBER	C	A	L2	P
DCP04-21	2.2	2.0	8	M1x0.25
DCP05-21	3.1	2.0	8	M1.6x0.20
DCP06-21	3.1	2.0	8	M1.6x0.20
DCP08-21	4.4	2.5	10	M2.3x0.25
DCP10-21	5.2	3.0	12	M2.5x0.35
DCP12-21	6.2	3.0	14	M3x0.35
DCP16-21	8.2	3.5	14	M4x0.35
DCP20-21	11.0	4.5	16	M4x0.35

RINGS



CATALOG NUMBER	D	L	B From Graphic Below
DC04	4	8	1.4
DC05	5	8	2
DC06	6	8	2
DC08	8	10	3
DC10	10	12	3
DC12	12	14	4
DC16	16	14	5
DC20	20	16	5

▶ CAD insertion point

Additional Plug and Ring Options: Specify catalog number as shown below for the different style plugs and rings.

Plug Styles: Recessed Lettering

Arrow Only
Cat #: DCP-Diam-AO
Ex.: DCP05-AO

C
Cat #: DCP-Diam-C
Ex.: DCP05-C

Ring Styles: Recessed Lettering

0 - 9
Cat #: DCN-Diam
Ex.: DCN05

A - M
Cat #: DCA-Diam
Ex.: DCA05

Blank
Cat #: DC-Diam-B
Ex.: DC05-B

N - Z
Cat #: DCZ-Diam
Ex.: DCZ05

Days
Cat #: DCL-Diam
Ex.: DCL05

Years
Cat #: DCY-Diam-Starting Year*
Ex.: DCY05-21


Note: The DCL04 and DCL05 does not have tick marks.

*Where years are specified, any year can be ordered by changing the suffix. Example DCP05-22 or DCY05-23.

Special configurations are available. Contact Customer Service for more information.

Plugs include springs and replacements are available.

Installation Guidelines:

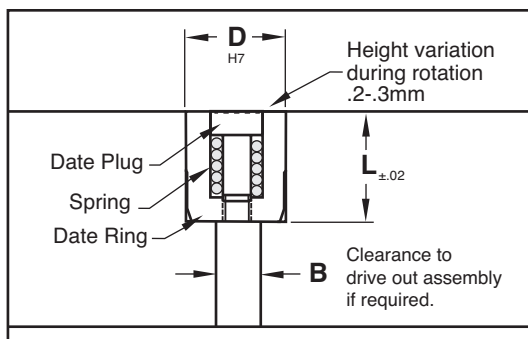

Maximum mold temperature: 285° F (140° C)